


09/22/99



JCS06 U.S. PRO

PATENT

Docket No. 1232-4570

Express Mail Label No. EJ606948032US



JCS06 U.S. PRO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

**UTILITY APPLICATION AND APPLICATION FEE TRANSMITTAL (1.53(b))**

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Named Inventor(s) and  
Address(es):

Kenji Morita, 8-27-104, Tsunashimahigashi 4-chome, Kohoku-ku, Yokohama-shi,  
Kanagawa-ken, Japan; and Tomoaki Kawai, 13-2-420, Osone 3-chome, Kohoku-ku,  
Yokohama-shi, Kanagawa-ken, Japan

For:

CAMERA CONTROL SYSTEM, IMAGE PICK-UP SERVER, CLIENT, CONTROL  
METHOD AND STORAGE MEDIUM THEREFOR

Enclosed are:

☒ 45 page(s) of specification, 1 page(s) of Abstract, 12 Page(s) of claims

☒ 21 sheets of drawing ☒ formal ☐ informal

☐ — Page(s) of Declaration and Power of Attorney

☐ Unsigned

☐ Newly Executed

☐ Copy from prior application

☐ Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)

☒ Incorporation by Reference: The entire disclosure of the priority application(s) identified below, is considered as being part of the disclosure of the accompanying application and is incorporated herein by reference.

☐ Microfiche Computer Program (Appendix)

☐ — page(s) of Sequence Listing

☐ computer readable disk containing Sequence Listing

☐ Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same

- ☒ Claim for Priority Japanese Application Nos. 10-277659 filed 9/30/98; and 10-372270 filed 12/28/98
- ☐ Certified copy of Priority Document(s)
- ☐ English translation documents
- ☐ Information Disclosure Statement
- ☐ Copy of    cited references w/ English Abstracts
- ☐ Copy of PTO-1449 filed in parent application serial No.
- ☐ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☐ Assignment Papers (assignment cover sheet and assignment documents)
- ☐ A check in the amount of \$40.00 for recording the Assignment.
- ☐ Assignment papers filed in parent application Serial No.                                     .
- ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☐ This is a ☐ continuation ☐ divisional ☐ continuation-in-part (C-I-P) of prior application serial no.                     .
- ☐ Cancel in this application original claims                                      of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
- ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until                                     .
- ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
- ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
- ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:  
This is a ☐ continuation ☐ divisional ☐ continuation-in-part of co-pending application Serial No.                      filed                     .

## I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)

					Basic Fee
	Number Filed		Number Extra	Rate	\$ 760.00
Total Claims	29	-20=	9	x\$18.00	\$ 162.00
Independent Claims	10	-3=	7	x78.00	\$ 546.00
Multiple Dependent Claims					
	[ ] yes		Additional Fee =	\$260.00	
	[ X ] no		Add'l Fee =	NONE	\$

Total: \$1,468.00

- [ ] A statement claiming small entity status is attached or has been filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$ \_\_\_\_\_.
- [ X ] A check in the amount of \$1,468.00 for payment of the application filing fees is attached.
- [ ] Charge Fee(s) to Deposit Account No. 13-4500. Order No. \_\_\_\_\_. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.
- [ X ] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 1232-4570. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN &amp; FINNEGAN, L.L.P.

By: Michael M. Murray  
Registration No. 32,537Dated: September 22, 1999

CORRESPONDENCE ADDRESS  
 MORGAN & FINNEGAN, L.L.P.  
 345 Park Avenue  
 New York, New York 10154  
 (212) 758-4800  
 (212) 751-6849 Facsimile

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s) : Kenji Morita and Tomoaki Kawai  
Serial No. : TBA Group Art Unit : TBA  
Filed : September 22, 1999 (Herewith)  
For : CAMERA CONTROL SYSTEM, IMAGE PICK-UP SERVER, CLIENT, CONTROL  
METHOD AND STORAGE MEDIUM THEREFOR

EXPRESS MAIL CERTIFICATE

Express Mail Label No. EJ606948032US


Date of Deposit September 22, 1999

I hereby certify that the following attached paper(s) and/or fee  
Application Fee Transmittal (in duplicate); 45 pp. of specs., 1 page of abstract, 12 Pp. claims (29 TOTAL  
claims); 21 Sheets of Formal Drawings (Figs. 1-21); Check in the amount of \$1,468.00; and return receipt  
postcard

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37  
C.F.R. §1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box New  
Applications, Washington, D.C. 20231.

Francisco J. Garcia

Typed or printed name of person  
mailing paper(s) and/or fee)

  
(Signature of person mailing  
paper(s) and/or fee)

CORRESPONDENCE ADDRESS:  
MORGAN & FINNEGAN, L.L.P.  
345 Park Avenue  
New York, New York 10154  
(212) 758-4800  
(212) 751-6849 Facsimile

TITLE OF THE INVENTION

CAMERA CONTROL SYSTEM, IMAGE PICK-UP SERVER, CLIENT,  
CONTROL METHOD AND STORAGE MEDIUM THEREFOR

5

BACKGROUND OF THE INVENTION

This invention relates to a camera control system,  
which is capable of controlling a remote camera, ideal  
10 for application to surveillance cameras, etc.

A camera control system for controlling the  
shooting direction and zoom magnification of a remote  
camera via a network has already been proposed by the  
assignee of the present applicant.

15 However, there is the danger that an imaging area  
in which problems arise in terms of privacy may fall  
within the field of view of the camera. The camera  
cannot be installed at such a location for this reason.

20

SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is  
to provide a camera control system which will not invade  
one's privacy even at a location where there is a  
25 problem in terms of privacy.

According to the present invention, the foregoing

0940400-02229  
object is attained by providing a camera control  
apparatus for controlling shooting direction and zoom  
magnification of a camera, comprising: input means for  
inputting a control command for controlling shooting  
5 direction or zoom magnification of the camera;  
calculation means for calculating, on the basis of the  
control command input by the input means, an area to be  
imaged by the camera; limiting means for limiting a  
control range of the zoom magnification of the camera in  
10 a case where the imaging area of the camera calculated  
by the calculation means overlaps a prescribed area; and  
control means for controlling the zoom magnification of  
the camera so as to fall within the control range, which  
has been limited by the limiting means, in a case where  
15 the zoom magnification of the camera exceeds the control  
range limited by the limiting means.

In accordance with the present invention, the  
camera control apparatus further comprises storage means  
for storing limit information, which concerns the  
20 control range of the zoom magnification of the camera,  
corresponding to the prescribed area.

In accordance with the present invention, the  
limiting means limits an upper limit of the zoom  
magnification of the camera in such a manner that the  
25 upper limit of the zoom magnification of the camera will  
be lower than in a case where the imaging area of the

camera does not overlap the prescribed area.

In accordance with the present invention, the control means controls the zoom magnification of the camera to the upper limit of the control range, which  
5 has been limited by the limiting means, in a case where the zoom magnification of the camera has exceeded the upper limit of the control range limited by the limiting means.

In accordance with the present invention, there is  
10 provided a camera control system for controlling shooting direction and zoom magnification of a camera from an operation terminal via a network, wherein the operation terminal comprises: input means for inputting a control command for controlling shooting direction or  
15 zoom magnification of the camera, and output means for outputting the control command, which has been input by the input means, to a camera control apparatus that controls the camera; and the camera control apparatus comprises: calculation means for calculating, on the  
20 basis of the control command output by the operation terminal, an area to be imaged by the camera; limiting means for limiting a control range of the zoom magnification of the camera in a case where the imaging area of the camera calculated by the calculation means  
25 overlaps a prescribed area; and control means for controlling the zoom magnification of the camera so as

to fall within the control range, which has been limited by the limiting means, in a case where the zoom magnification of the camera exceeds the control range limited by the limiting means.

5        In accordance with the present invention, the camera control apparatus further comprises storage means for storing limit information concerning the control range of the zoom magnification of the camera corresponding to the prescribed area.

10       In accordance with the present invention, the limiting means limits an upper limit of the zoom magnification of the camera.

         In accordance with the present invention, the control means controls the zoom magnification to the  
15    upper limit of the control range, which has been limited by the limiting means, in a case where the zoom magnification of the camera has exceeded the upper limit of the control range limited by the limiting means.

         The present invention further provides a camera  
20    control method for controlling shooting direction and zoom magnification of a camera, comprising: an input step of inputting a control command for controlling shooting direction or zoom magnification of the camera; a calculation step of calculating, on the basis of the  
25    control command input by the input step, an area to be imaged by the camera; a limiting step of limiting a



control range of the zoom magnification of the camera in  
a case where the imaging area of the camera calculated  
by the calculation step overlaps a prescribed area; and  
a control step of controlling the zoom magnification of  
5 the camera so as to fall within the control range, which  
has been limited by the limiting step, in a case where  
the zoom magnification of the camera exceeds the control  
range limited by the limiting step.

In accordance with the present invention, the  
10 camera control method further comprises a storage step  
of storing limit information concerning the control  
range of the zoom magnification of the camera  
corresponding to the prescribed area.

In accordance with the present invention, the  
15 limiting step limits an upper limit of the zoom  
magnification of the camera.

In accordance with the present invention, the  
control step controls the zoom magnification of the  
camera to the upper limit of the control range, which  
20 has been limited by the limiting step, in a case where  
the zoom magnification of the camera has exceeded the  
upper limit of the control range limited by the limiting  
step.

A storage medium storing a camera control program  
25 for controlling shooting direction and zoom  
magnification of a camera, wherein the stored program

calculates, on the basis of a control command for  
controlling shooting direction or zoom magnification of  
the camera, an area to be imaged by the camera; limits a  
control range of the zoom magnification of the camera in  
5 a case where the calculated imaging area of the camera  
overlaps a prescribed area; and controls the zoom  
magnification of the camera so as to fall within the  
limited control range in a case where the limited  
control range is exceeded.

10 In accordance with the present invention, the  
stored control program further stores limit information  
concerning the control range of the zoom magnification  
of the camera corresponding to the prescribed area.

In accordance with the present invention, the  
15 stored control program further limits an upper limit of  
the zoom magnification of the camera.

In accordance with the present invention, the  
stored control program further controls the zoom  
magnification of the camera to the upper limit of the  
20 control range in a case where the upper limit of the  
limited control range is exceeded.

In accordance with the present invention, there is  
provided a camera control apparatus for controlling zoom  
magnification of a camera, comprising: input means for  
25 inputting a control command for controlling zoom  
magnification of the camera; calculation means for

calculating, on the basis of the control command input  
by the input means, an area to be imaged by the camera;  
limiting means for limiting a control range of the zoom  
magnification of the camera in a case where the imaging  
5 area of the camera calculated by the calculation means  
overlaps a prescribed area; and control means for  
controlling the zoom magnification of the camera so as  
to fall within the control range, which has been limited  
by the limiting means, in a case where the zoom  
10 magnification of the camera exceeds the control range  
limited by the limiting means.

The present invention further provides a camera  
control method for controlling zoom magnification of a  
camera, comprising: an input step of inputting a  
15 control command for controlling zoom magnification of  
the camera; a calculation step of calculating, on the  
basis of the control command input by the input step, an  
area to be imaged by the camera; a limiting step of  
limiting a control range of the zoom magnification of  
20 the camera in a case where the imaging area of the  
camera calculated by the calculation step overlaps a  
prescribed area; and a control step of controlling the  
zoom magnification of the camera so as to fall within  
the control range, which has been limited by the  
25 limiting step, in a case where the zoom magnification of  
the camera exceeds the control range limited by the

limiting step.

In accordance with the present invention, the network is a LAN or ISDN line.

Another object of the present invention is to  
5 provide an image pick-up server, a client, a control method and a storage medium therefor, in which it is possible to provide an excellent operating environment, without giving a client an odd impression, while setting a plurality of scattered imaging control areas within a  
10 range in which imaging can be performed by image sensing means whose shooting direction can be changed.

According to the present invention, there is provided an image pick-up server, which has image sensing means, for performing a distribution service  
15 which distributes video information obtained by the image sensing means to a client via a network, comprising: storage means for setting a plurality of shootable areas, which are the object of the distribution service, within a range in which shooting  
20 direction of the image sensing means can be changed, and storing information relating to the plurality of shootable areas set and information which specifies a plurality of virtual image sensing means for respective ones of the shootable areas; and control means for  
25 reading out, from the storage means, information corresponding to virtual image sensing means selectively

designated by the client, setting a range in which it is possible to change the shooting direction of the image sensing means based upon the information relating to the shootable area indicated by the information that has  
5 been read out, and controlling the image sensing means within the range in which it is possible to change the shooting direction.

Other features and advantages of the present invention will be apparent from the following  
10 description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

15 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a camera control apparatus according to an embodiment of the present invention;

20 Fig. 2 is a diagram showing an example of a look-up table serving as zoom limiting information;

Fig. 3 is a processing flowchart illustrating the operation of the embodiment;

Fig. 4 is a conceptual view showing an example of  
25 the relationship between the imaging area of a camera and areas in which zoom magnification is to be limited;

Fig. 5 is a conceptual view showing an example of the relationship between the imaging area of a camera and areas in which zoom magnification is to be limited;

Fig. 6 is a conceptual view showing an example of the relationship between the imaging area of a camera and areas in which zoom magnification is to be limited;

Fig. 7 is a conceptual view showing an example of the relationship between the imaging area of a camera and areas in which zoom magnification is to be limited;

Fig. 8 is a flowchart illustrating the operation of the embodiment;

Fig. 9 is a block diagram of a camera control system according to this embodiment of the present invention;

Fig. 10 is a block diagram showing a camera system according to a second embodiment of the present invention;

Fig. 11 is a diagram showing a user interface on the client side according to the second embodiment;

Fig. 12 is a diagram showing an operating sequence in the system according to the second embodiment;

Fig. 13 is a flowchart showing the operation of a camera service according to the second embodiment;

Fig. 14 is a flowchart showing the operation of a camera service according to the second embodiment;

Fig. 15 is a flowchart showing the operation of a

camera service according to the second embodiment;

Fig. 16 is a flowchart showing the operation of a client according to the second embodiment;

Fig. 17 is a diagram showing the format of each  
5 command in the second embodiment;

Fig. 18 is a diagram showing an example of setting of a shootable area in the second embodiment;

Fig. 19 is a diagram showing the structure of a camera-control limits list according to the second  
10 embodiment;

Fig. 20 is a diagram showing the configuration of a system according to a modification of the second embodiment; and

Fig. 21 is a diagram showing a camera list in the  
15 system of Fig. 20.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention will now be  
20 described with reference to the drawings.

##### (First Embodiment)

Fig. 1 is a block diagram showing a camera control apparatus 101 according to this embodiment. A camera 111 equipped with a pan head is panned and tilted by  
25 controlling the pan head, thereby controlling the shooting direction of the camera. The camera 111 is

equipped with a zoom lens the imaging angle of view of which can be changed. The image picked up by the camera 111 is output to a display controller 116. The latter executes predetermined signal processing and then  
5 displays the captured image on a monitor 117. The monitor 117 is constituted by a bitmap display or the like.

A camera operating panel 114, which comprises a mouse or keyboard (not shown), etc., is capable of  
10 inputting commands for controlling panning tilting and zooming of the camera 111. A zoom limiting processor 113 determines whether to limit zoom magnification in dependence upon the pan, tilt and zoom control commands entered from the camera operating panel 114. A storage  
15 unit 115, which comprises a RAM or the like, stores a look-up table serving as zoom limiting information, which is shown in Fig. 2. The look-up table is composed of the following for each limited area: x coordinates (coordinates in the pan direction), y coordinates  
20 (coordinates in the tilt direction) and the maximum allowable zoom ratio for the area. The coordinates of the center of a range in which the panning and tilting of the camera 111 can be changed is assumed to be (0,0).

The zoom limiting processor 113 decides limiting of  
25 zoom magnification based upon the look-up table shown in Fig. 2. A camera pan-head controller 112 controls



panning tilting and zooming of the camera 111 based upon the commands input from the camera operating panel 114 for controlling panning tilting and zooming of the camera 111, and a zoom limiting command from the zoom limiting processor 113. In this embodiment, the camera pan-head controller 112 and zoom limiting processor 113 may be implemented by processing executed by the same microprocessor, such as a CPU.

Fig. 3 is a flowchart of processing illustrating operation of this embodiment. Figs. 4 through 7 are conceptual views showing an example of the relationship between the imaging area of the camera 111 and areas in which imaging is to be limited. An area 201 indicates the maximum control range over which imaging is possible by panning and tilting a camera. Numerals 202 and 203 denote areas in which zoom magnification is to be limited. As illustrated also in Fig. 2, the limitations on zoom magnification are such that the magnifications are 2.0X and 1.5X in areas 202 and 203, respectively. An area 204 indicates an imaging range calculated at a step S302, described later. It should be noted that if zoom magnification is not limited, then the zoom magnification of the camera 111 is capable of being controlled up to a maximum of 10X.

First, at step S301 in Fig. 3, a command for controlling the zoom magnification of the camera 111 or

commands for controlling panning and tilting of the camera 111 are input from the camera operating panel 114. Control then proceeds to step S302, at which an area in which imaging is to be performed by the camera 111 is calculated in advance by the zoom limiting processor 113 based upon the entered commands.

If it is found at step S303 that the imaging area 204 calculated beforehand overlaps the area 202 limited to the zoom magnification shown in the look-up table of Fig. 2, control proceeds to step S304. Fig. 4 illustrates an example of the relationship between the calculated imaging area and the limited areas at this time. If the calculated area does not overlap the areas of limited zoom magnification, control proceeds to step S306.

It is determined at step S304 whether a requested zoom magnification is greater than the maximum allowable zoom magnification (2.0X) of the limited area 202. If the requested zoom magnification exceeds the limit on the zoom magnification set for the limited area 202, control proceeds to step S305. Here the camera pan-head controller 112 revises the control target of zoom magnification of camera 111 from the usual controllable zoom magnification (10X) to the maximum allowable zoom magnification (2.0X) of limited area 202. On the other hand, if it is found at step S304 that controlled zoom

magnification does not exceed the limit on zoom magnification (in which case the relationship between the imaging area and the limited area at this time will be as shown in Fig. 7), then control proceeds to step

5 S306. If the check regarding the area 202 of limited zoom magnification is finished, then, in order to check the area 203 of limited zoom magnification, the processing of steps S303 to S305 is executed. By way of example, if the calculated imaging area 204 and the

10 limited area 203 overlap, as shown in Fig. 5, owing to revision of the control target of zoom magnification to 2.0X by the above-described processing, then the revised zoom magnification exceeds the maximum allowable zoom magnification of limited area 203. Consequently, the

15 control target of zoom magnification is revised again, becoming 1.5X. The relationship between the imaging area and the limited areas in this case is as shown in Fig. 6.

If the checking of all areas of limited zoom

20 magnification present in the look-up table is completed, control proceeds to step S307.

If it is found at step S307 that the control target of zoom magnification has been revised, control returns to step S302 so that all limited areas in the look-up

25 table are checked again through steps S302 to S306. If it is determined by this recheck that the revision of

the zoom magnification is correct, control proceeds to step S308, where a control signal for controlling the camera 111 to the revised zoom magnification is output to the camera pan-head controller 112. On the basis of this control signal, the camera pan-head controller 112 drives the zoom lens of the camera 111 and, on the basis of pan and tilt control commands from the camera operating panel 114, controls panning and tilting to move the shooting direction.

10 In accordance with this embodiment, as described above, controlling the panning and tilting of the camera 111 provides a limit on zoom magnification in an area, in which privacy is a concern, located in the range capable of being shot by the camera. An area in which  
15 imaging will take place is calculated beforehand based upon a control command input by the camera operating panel 114. If overlap occurs between the calculated imaging area and an area in which zoom magnification is limited, reference is had to the allowable zoom  
20 magnification of the limited area and a limitation is imposed upon zoom control in such a manner that the upper limit of zoom magnification is lowered below that which prevails when there is no overlap. As a result, it is possible to control imaging by the camera, even at  
25 locations where privacy is a concern, without infringing upon such privacy. Since the maximum allowable zoom

magnification can be made different for each limited area, an apparatus can be provided that makes it possible to deal flexibly with limited areas having a high degree of importance.

5           In the embodiment described above, the zoom magnification is limited if overlap occurs between the imaging area calculated by the zoom limiting processor 113 and the area in which zoom magnification is to be limited. However, an arrangement may be adopted in  
10 which zoom magnification is limited in a case where the position of the center of a calculated imaging field of view falls within the area in which zoom magnification is to be limited.

Further, as shown in Fig. 9, this embodiment can be  
15 applied to a camera control system in which it is possible to control the camera control apparatus 101 from a remote operating terminal 102 via a network 103 such as a LAN (Local Area Network) or ISDN (Integrated Services Digital Network) line. A plurality of camera  
20 control apparatus and operating terminals 102 can be connected on the network 103 so that a desired camera control apparatus 101 can be controlled from any control terminal 102. Blocks shown in Fig. 9 that are identical with those of Fig. 1 are designated by like reference  
25 characters and need not be described again.

The operating terminal 102 includes a controller

125 for controlling the overall operating terminal 102,  
 and a camera operating unit 124, which comprises a mouse  
 and keyboard, for controlling panning, tilting and  
 zooming of the camera 111. A control command that has  
 5 been entered by the camera operating unit 124 is output  
 to the camera control apparatus 101 via a communication  
 interface 121. The camera control apparatus 101 has a  
 communication interface 119 for receiving pan, tilt and  
 zoom camera control signals output by the operating  
 10 terminal 102 and outputting these signals to the zoom  
 limiting processor 113, and the zoom limiting processor  
 113 executes processing similar to that described above.  
 The camera control apparatus 101 further includes a  
 video processor 118 for applying compression processing  
 15 to an image signal picked up by the camera 111,  
 converting the signal to a signal conforming to the  
 network specifications, and outputting the signal from  
 the communication interface 119 to the operating  
 terminal 102. The operating terminal 102 further  
 20 includes an image expansion unit 122 for expanding image  
 data received at the communication interface 121, and a  
 display controller 125 for executing prescribed signal  
 processing and causing a monitor 126 to display a sensed  
 image.

25 The above-described embodiment uses a camera, which  
 is equipped with a pan head, the shooting direction of

which can be controlled. However, the processing of this embodiment can be executed even with a camera whose shooting direction is fixed. Fig. 8 is a flowchart of processing for operating the camera 111 in a case where  
5 the shooting direction is fixed. Except for the fact that input of pan and tilt control commands is excluded from step S801 and execution of pan and tilt control is excluded from step S808, this processing is identical with that shown in Fig. 3 and need not, therefore, be  
10 described again.

In this embodiment, input means corresponds to the camera operating panel 114 or camera operating unit 124, calculation means corresponds to the zoom limiting processor 113, limiting means corresponds to zoom  
15 limiting processor 113 and storage unit 115, control means corresponds to the camera pan-head controller 112, and output means corresponds to the communication interface.

Thus, in accordance with the first embodiment, as  
20 described above, it is possible to provide a camera control system which will not invade one's privacy even at a location where there is a problem in terms of privacy.

#### (Second Embodiment)

25 A second embodiment of the present invention will now be described in detail with reference to the

accompanying drawings.

Briefly stated, the second embodiment is such that when a client looks through a camera that has been connected to a camera server, it appears just as if  
5 there are a plurality of cameras.

Fig. 10 of a system according to the second embodiment.

The system shown in Fig. 10 includes a camera server 1-1, a display control terminal (referred to as a  
10 "client") 1-2 for displaying video from the camera server 1-1 and remotely controlling a camera, and a network 1-3 for connecting the camera server 1-1 and client 1-2.

The camera server 1-1 captures video from a video  
15 camera 1-11, distributes the video to the client 1-2, accepts camera control commands from the client 1-2 and controls the zoom magnification of the video camera 1-11 and a movable pan head 1-12. (Operating the movable pan head 1-12 makes it possible to change the pan and tilt  
20 angles.)

Though one camera server 1-1 and one client 1-2 are illustrated in Fig. 10, this is for the sake of simplifying the description and there is no limitation upon the numbers thereof. The description given below  
25 also assumes one camera server and one client. As long as the network 1-3 is a digital network such as the



Internet or intranet having a bandwidth sufficient for transferring a camera control signal and compressed video signal, described later, any type of network will suffice.

5           It is assumed that the TCP/IP (UDP/IP) protocol is the network protocol in this embodiment, and when an address is mentioned below, this is taken to indicate an IP address. Further, it is assumed that IP addresses have been assigned to the camera server 1-1 and client  
10 1-2.

          The camera server 1-1, which can be implemented by a personal computer, includes the video camera 1-11; the movable pan head 1-12 for controlling pan and tilt angles of the video camera 1-11; a camera/pan-head  
15 controller 1-13 for controlling the video camera 1-11 and the zoom magnification and pan and tilt angles of the movable pan head 1-12; a video input unit 1-15 for capturing video from the video camera 1-11; a video compression unit 1-16 for compressed captured video  
20 data; a communications control unit 1-14 for distributing compressed video data over the network; a command interpretation/execution unit 1-17 for interpreting commands from the client 1-2 via the network 1-3 and controlling the components of the camera  
25 server; and a storage unit 1-18 used in passing data among the various components.

The video input unit 1-15 captures an NTSC video signal from the video camera 1-11, converts the analog signal to a digital signal, compresses the digital signal in accordance with motion JPEG and delivers the  
5 resulting signal to the communications control unit 1-14. Though compression according to motion JPEG is used here as the video compression format, it is obvious that this does not impose a limitation and any compression format by may be employed.

10 The client 1-2 will now be described. As in the case of the server, the client can also be implemented by a general-purpose information processing apparatus such as a personal computer. Compressed video data distributed from the camera server 1-1 is received  
15 through a communication control unit 1-21, expanded by a video expansion unit 1-25 and displayed on a video display unit 1-26. It is also arranged so that camera control and operations for storing and saving images can be performed by operating a user interface with which  
20 the client is provided. Control for display and manipulation of screens is performed by a display controller 1-24.

The video display unit 1-26 includes a bitmap display that is capable of constructing a screen (user  
25 interface) of the kind shown in Fig. 11. A window system is used as the video display unit 1-26 in this

embodiment. Examples of this system are Microsoft's Windows 95 and the UNIX X-Window, etc.

As shown in Fig. 11, a video display area 2-1 is for displaying video, and a camera operation panel 2-2 is for operating a camera. The latter is displayed in a window format. The camera operation panel 2-2 has scroll bars 2-22, 2-23, 2-28 that make it possible to manipulate camera pan angle, tilt angle and zoom magnification. The scroll bar 2-22 for manipulating pan angle has a rectangular scroll box, which is displayed in the bar, for being moved to the left or right (generally referred to as "dragging") by a pointing device such as a mouse, whereby a command designating the pan angle is sent to the camera server. The position at which the scroll box is displayed indicates the present position in an area in which manipulation of the pan angle is limited. The scroll bar 2-23 is for manipulating tilt angle, and the scroll bar 2-28 is for manipulating zoom magnification. The method of manipulation and the meaning of the positions of the scroll boxes are similar to those of the scroll bar 2-22 for pan angle.

As described earlier, users of a plurality of clients can view video from the same camera of the same camera server. In the end, however, only one client has the right to control the camera. For other clients,

therefore, the scroll bars 2-22, 2-23 and 2-28 are displayed in a form to show that they are inoperable (as by displaying the scroll bars in dimmed fashion). The privilege to control the camera is acquired by using a mouse or the like to click a control start button 2-21 shown in Fig. 11. If the button 2-21 is clicked, a control-privilege acquisition request is sent to the camera server at the destination of the connection. When the request is received and another client has already been issued the control privilege, the camera server notifies the requesting client that the request is rejected. If no other client has been issued the control privilege, then the camera server issues this privilege to the requesting client. It should be noted that the camera server measures the length of time the control privilege has been granted to one client and, when a predetermined length of time expires, sends this client notification of the fact that the control privilege will be nullified.

With reference again to the user interface of Fig. 11, a camera changeover button 2-30 is for displaying a pull-down menu of the kind shown at 2-31 when the button 2-30 is clicked. In the case of the pull-down menu 2-31, any of three cameras denoted camera 1 to camera 3 can be selected. The camera names do not indicate actual cameras (the camera server in this embodiment has

only one physical camera) but correspond to "virtual cameras", described below. In response to camera selection, a changeover (selection) is made among the virtual cameras. Further, it is assumed that the name  
5 of the virtual camera currently selected is displayed on the button 2-30. List information indicating selectable virtual cameras is transmitted from the camera server when this client is connected to the camera server.

A virtual camera will be described with reference  
10 to Fig. 18.

A border 9-3 indicates a range within which imaging is possible over the full range of pan and tilt angles capable of being shot by the camera 1-11 of the camera server 1-1. (Tthis is a range in which the zoom  
15 magnification of the camera is minimum.) The areas represented by the hatching indicate areas in which shooting is allowed. In other words, the area outside these hatched areas indicates an area in which imaging is not allowed for reasons of privacy, etc.

Since the pan and tilt angles of the camera 1-11  
20 can be changed, the user of the client would naturally think that the shooting direction (angle) of one camera could be varied over an area having a rectangular shape. In other words, it would seem odd to the user if one  
25 camera could shoot in an L-shaped area and in another area separated from it, as shown in Fig. 18. In order

not to give the user such an odd impression, therefore, this embodiment is so adapted that an area in which image pick-up is possible is divided into several rectangular areas and virtual cameras are assigned to  
5    respective ones of these rectangular areas (the three areas indicated at 9-11, 9-12 and 9-13 in Fig. 18). As a result, as far as the user is concerned, it appears just as if a plurality of (three) cameras (virtual cameras) have been connected to the camera server 1-1  
10    and just as if the angles of these cameras can be changed freely within the respective rectangular areas. The user, therefore, does not receive an odd impression. The camera names displayed in the pull-down menu 2-31 of Fig. 11 thus indicate virtual cameras.

15    Assume that the pan angle is represented by  $\theta$  (the farther the camera is panned to the right, the greater the value of  $\theta$ ), that the tilt angle is represented by  $\phi$  (the farther the camera is panned upward, the greater the value of  $\phi$ ), and assume that the zoom magnification  
20    is represented by  $z$  (the larger the magnification, the larger the value of  $z$ ). The range within which a specific virtual camera can be controlled can be set as follows, by way of example:

$\theta_{\min} \leq \theta \leq \theta_{\max}$  ( $\theta_{\min}$ : pan angle, left extreme;

25     $\theta_{\max}$ : pan angle, right extreme);

$\phi_{\min} \leq \phi \leq \phi_{\max}$  ( $\phi_{\min}$ : tilt angle, lower limit;

$\phi_{\max}$ : tilt angle; upper limit);

$Z_{\min} \leq Z \leq Z_{\max}$  ( $Z_{\min}$ : zoom magnification, lower limit;  $Z_{\max}$ : zoom magnification; upper limit).

By way of example, if this is applied to the  
5 rectangular area 9-11 in Fig. 18, the pan and tilt control range of the virtual camera corresponding to this area will have the following diagonal coordinates:  $(\theta_{\min}, \phi_{\min}), (\theta_{\max}, \phi_{\max})$ .

Of course,  $(\theta_{\min}, \phi_{\min}), (\theta_{\max}, \phi_{\max})$  fall within  
10 the overall physical range within which control is possible. Though the number of virtual cameras is three in this embodiment, this does not impose a limitation because, in theory, any number of virtual cameras can be set up. Further, it does not matter if the areas  
15 indicating the ranges within which virtual cameras can be controlled overlap. It is assumed that all of the virtual cameras have been assigned ID numbers for identifying these cameras. In terms of internal structure, it is assumed that a camera control-range  
20 table of the kind shown in Fig. 18 is stored in a shared memory 3-43. In addition, the number of physical cameras connected to one camera server is not limited to one; two or more physical cameras may be connected. In such case one physical camera and the table shown in  
25 Fig. 19 would be made to correspond. That is, tables of the kind shown in Fig. 19 would be provided in a number

equivalent to the number of physical cameras.

Fig. 12 illustrates a process in accordance with the present invention. This process signifies one in a multitask operating system such as a Windows NT or UNIX operating system. It is assumed that all processes 3-11, 3-12, 3-21, 3-22 and 3-31 are operating in the steady state.

Each process that operates on the camera server 1-1 will now be described.

10       ·Camera control server process 3-11: This process executes control for accepting a camera control command, which has been issued by a client process 3-31 having the control privilege, and outputting the command to the camera/pan-head controller 1-13.

15       ·Camera-status notification process 3-12: This process senses the states of pan and tilt angles of a camera and notifies the client process 3-31.

      ·Video server process 3-21: This process manages the destination of camera video transmission.

20       ·Video acquisition/transmission process 3-22: This process captures and transmits camera video.

      It should be noted that a video-display inhibit flag 3-41, a transmission destination list 3-42, a camera control-range limiting list 3-43 and a camera-status register 3-44 have been provided in a shared  
25       memory used in passing data between processes. Further,



a camera-control limited range register 3-45, a control privilege flag 3-51 and a camera number list 3-52 are registers for temporarily saving data used in the processes.

- 5           The details of the operation of processes 3-11 to 3-22 in the camera server 1-1 are illustrated in the flowcharts of Figs. 13, 14 and 15. The client process 3-31 runs on the camera client 1-2, and the details of this operation are illustrated in the flowchart of Fig.
- 10 16. It should be noted that the programs corresponding to these flowcharts have been stored in a storage device (e.g., a hard disk or the like) possessed by the server or client and are loaded to a main memory (main RAM) in order to be executed.

- 15           First the processes of the camera server will be described with reference to the flowcharts of Figs. 13 to 15.

It should be noted that packets having a format of the kind shown in Fig. 17 are generated and transmitted to the network 1-3. (Strictly speaking, use is made of a format employed in TCP/IP or UDP/IP packets, etc. In Fig. 17, however, only packet information necessary for describing this embodiment is shown.)

20

- The camera control process and camera-status notification processing will be described using the flowchart of Fig. 13.
- 25

When the camera control server process 3-11 is started up (step S400), the camera-status notification process 3-12 is generated (step S402) and a camera-control connect request [(1) in Fig. 17] from the client process 3-31 is awaited (step S403). When there is a connect request from the client process 3-31, connect acceptance processing (for sending back Ack) is executed (step S404) and camera control commands [(2) to (4) in Fig. 17) sent from the connected client process 3-31 are awaited (step S405). In connect acceptance processing, the client is notified of the list information concerning the virtual cameras possessed by the camera server, as described earlier. That is, the list information is transferred to the client. At this time a timer is set. If a certain fixed time (referred to as "control waiting time") elapses, the camera control connection is severed (step S407).

If camera control commands [(2) to (4) in Fig. 17] are received, the camera/pan-head controller 1-13 controls the zoom magnification of the video camera 1-11 and the pan and tilt angles of the movable pan head 1-12 in accordance with these commands (step S409). Until control waiting time elapses, camera control commands are accepted from the client process 3-31 and camera control conforming to the commands is performed through the command interpretation/execution unit 1-17 and

camera/pan-head controller 1-13. The details of processing conforming to control commands are illustrated in Fig. 14. In order to simplify the description, it is assumed that the camera control commands are as follows:

pan-angle change command	PAN $\theta$
tilt-angle change command	TIL $\phi$
zoom-magnification change command	ZOM $\alpha$

It should be noted that  $\theta$ ,  $\phi$ ,  $\alpha$  are parameters representing pan angle, tilt angle and zoom magnification, respectively. Though various settings of values for a backlighting correction, autofocus and manual focus are possible, these are not described here.

The following command [(5) in Fig. 17] for changing over virtual cameras also is available:

camera changeover command      SEL n

(where n indicates the identification number of a virtual camera).

When a camera changeover request command is issued, a control range corresponding to the identification number of a virtual camera is read out of the camera control-range limiting list 3-43 and set in the camera-control limited range register 3-45 and camera-status register 3-44 (step S502). Next, pan, tilt and zoom values calculated in the next procedure are initialized as the initial position of the virtual camera (step

S504). The initially set values of the virtual camera are values at the center of the limited range in regard to the pan and tilt angles and minimum magnification of the limited range in regard to the zoom magnification.

- 5 However, it is permissible to decide the pan and tilt angles and the zoom magnification of the limited range in advance and then set the pan and tilt angles and the zoom magnification to these values.

- There is a possibility that an area in which a  
10 video transmission is not allowed will be traversed during a changeover of virtual cameras, namely during a change in camera panning, tilting and zooming. The video-display inhibit flag is set (turned ON), therefore, so that video will not be transmitted at such  
15 time (step S503). When the video-display inhibit flag is ON, "-1" information is reported to each client as the identification number of the virtual camera, as will be described later. Thus, in a case where the selected virtual camera is in the state that has been set at step  
20 S502 (regarding pan angle, tilt angle and zoom magnification), the video-display inhibit flag is turned off. As a result, processing for distributing video can be executed again.

- In the case of a pan/tilt or zoom request command,  
25 on the other hand, it is determined whether the pan angle, tilt angle and zoom magnification fall within the

control range of the virtual camera (steps S511, S521).  
In a case where a value is outside the range, the value  
is reset to the upper limit (in case of a value that is  
too large) or lower limit (in case of a value that is  
5 too small) of the control range. Camera control is then  
carried out.

If a fixed period of time elapses from the start  
of the connection for camera control and control waiting  
time expires, disconnect processing (step S407) is  
10 executed. During the processing of step S407, a camera-  
control disconnect command [(8) in Fig. 17], i.e., a  
command which takes away the camera control privilege,  
is sent back to the client process 3-31. Arrival of a  
connect request is again awaited (step S403). The  
15 camera control server process 3-11 accepts a camera-  
control connect request from any client process  
similarly implemented and operates the camera but, as  
will be understood from Fig. 13, a plurality of client  
processes cannot be connected simultaneously.  
20 Accordingly, it is assumed that this connection is  
connection oriented, as in the manner of TCP/IP.

The status of the camera is checked continuously  
while the camera-status notification process 3-12  
generated at step S402 is operating. That is, camera  
25 pan and tilt angles and zoom magnification (= p, t, z)  
are read in by making an inquiry of the camera/pan-head

controller 1-13, these are written to the camera-status register 3-44 (step S422) and the status of the video-display inhibit flag 3-41 is checked (step S423). If the flag is ON, it is construed that the camera status is "CAMERA BEING SWITCHED" (virtual-camera identification number n = -1) (step S424) and the client process 1-2 that is transmitting video is notified of the camera status [format of (9) in Fig. 17] (step S425).

- 10       The video server process and video acquisition/transmission process will now be described with reference to the flowchart of Fig. 15.

- When the video server process 3-21 is started up (step S600), the video acquisition/transmission process 15 3-22 is generated (step S602) and an event from the video server process 3-21 is awaited (step S603). If the event is a video-display start request command [(7) in Fig. 17] (step S604), then the packet transmission-source address contained in the video-display request 20 packet is checked and added to the video transmission destination list 3-42 (step S605). If the event is a video-display stop request command (step S606), then, in similar fashion, the packet transmission-source address contained in the video-display request packet is checked 25 and deleted from the transmission destination list 3-42. It should be noted that the address of the video-

transmission destination is retained in the video  
transmission destination list 3-42 in a list format.

When the video acquisition/transmission process  
3-22 is started up, the following operation is repeated:

- 5 The camera video is captured as a frame (step S622) and  
compression is carried out (step S623). If the video-  
display inhibit flag is ON (step S624), the compressed  
video data is converted to the packet formation shown at  
(10) in Fig. 17 and is transmitted to the plurality of  
10 addresses in the video transmission destination list  
3-42 (step S625).

The client process 3-31, which operates on the  
client side, will now be described in accordance with  
the flowchart of Fig. 16.

- 15 When this process is started up, initialization  
processing is executed (step S701) and a video-display  
start request is transmitted to the camera server  
corresponding to the address (IP address, here assumed  
to be "ADDR\_C") of the connected camera server 1-1 (step  
20 S702). The packet format at this time is as indicated  
at (6) in Fig. 17.

- If Ack is not sent back from the camera server that  
corresponds to ADDR\_C (step S703), this means that  
operation is abnormal, e.g., that the address is  
25 erroneous. The client process, therefore, is terminated  
(step S704).





waiting time elapses, the camera-control disconnect  
command [(8) in Fig. 17] is sent back from the camera  
control server process. When this is accepted (step  
S714), the control privilege flag 3-51 is turned OFF  
5 (step S715) to nullify operation at the camera operation  
panel 2-2 (step S716).

During the time that operation at the camera  
operation panel 2-2 is enabled, a camera control command  
that corresponds to the operation performed at the  
10 camera operation panel 2-2 is generated and sent to the  
client 1-2 (steps S717 - S718). In a case where a  
camera has been selected from the camera-changeover  
pull-down menu 2-31 of the camera operation panel 2-2, a  
camera changeover command [(5) in Fig. 17] is issued  
15 (steps S719 - S720). It should be noted that the  
process through which commands are generated is not  
shown.

In response to a client-process terminate request  
(step S726) issued by operation using the menu or the  
20 like, the camera-control disconnect command [(8) in Fig.  
17] is issued (step S728) and the client process is  
terminated (step S729).

If, in a case where a packet has arrived (step  
S721), the packet is video data [(10) in Fig. 17] (step  
25 S722), compressed video data contained in this video  
data is read out and subjected to expansion processing,

after which the displayed video on the video display panel 2-1 is updated using this video frame data (step S723).

In a case where the arriving packet is for camera-  
5 status notification [(9) in Fig. 17] (step S724), the display positions of the scroll boxes in the scroll bars 2-22, 2-23, 2-28 for manipulating the pan and tilt angles and zoom magnification are changed to the corresponding positions using parameters contained in  
10 the packet. Further, the camera name corresponding to the identification number of the virtual camera is displayed on the camera changeover button 2-30. (In a case where another client process is remotely controlling the camera, this information is updated.)  
15 The association between the identification number of the virtual camera and the camera name makes use of the corresponding relationship of which notification has been given by the camera-status notification process 3-12. It should be noted that when the identification  
20 number of the virtual camera is -1 (i.e., when the camera is currently moving within the shootable range of the virtual camera), it is construed that the operation for changing over the virtual camera is currently being carried out and a message to this effect is displayed on  
25 the video display panel 2-1.

In accordance with the second embodiment, the

result of the above-described operation is that, when viewed from the client, one physical camera possessed by a camera server appears just as if it were a plurality of cameras (virtual cameras). Moreover, if at least the

5 pan and tilt angles of each individual virtual camera are within a rectangularly shaped zone, they can be changed at will. Consequently, it does not matter that the user of the client is unaware that an area in which imaging is limited because of privacy-related reasons

10 exists within this zone. In addition, the user is not given an odd impression.

As described earlier, it is also possible to provide one camera server with a plurality of physical cameras. In this case also it would suffice to set up a

15 plurality of virtual cameras for each individual physical camera. It would then be so arranged that the camera server give the control privilege to the client independently on a per-physical-camera basis.

In the case of the administrator of the client

20 server, the administrator would operate the camera server directly to edit the camera-control limiting list. However, an arrangement may be adopted in which the administrator is connected in the same manner as the client, notifies the camera server of the fact that he

25 or she is the administrator (e.g., as by giving an ID or password) and transfers the file of the limiting list to

the camera server by a protocol such as ftp.

Alternatively, in the case of the administrator, an arrangement may be adopted in which the border of a range within which the pan and tilt angles of a physical camera can be changed is displayed on a screen and, using a pointing device such as a mouse, the administrator sets several rectangles within this border to thereby set virtual cameras corresponding to these rectangular areas as well as pan and tilt angles over which these virtual cameras can be moved. The administrator may set upper and lower limit values of zoom magnification in regard to set rectangular areas using a keyboard or mouse, etc., and processing according to the first embodiment described earlier may then be executed. Of course, in an instance where the administrator has logged in on the client side in order to accomplish this, a program for providing the administrator with the above-described control need only be run.

Next, a situation in which a camera server having a plurality of control limiting areas (a plurality of virtual cameras) and a camera server for which no particular restrictions have been set are connected to a network in mixed fashion will be described with reference to Fig. 20.

In a situation where a plurality of camera servers

exist, desirably a user utilizing a client server is presented with a list of the camera servers (e.g., a list of the kind shown in Fig. 21 is displayed) and employs a pointing device such as a mouse to select from the list the camera server he or she wishes to see.

When a camera server is selected by the user, the camera client transmits the video-display start request, as at step S702 in Fig. 16. If the present invention is utilized, a plurality of control limiting areas can be handled as separate, independent cameras in the same manner as another camera server. For example, in the user interface shown in Fig. 21, cameras 1 to 3 correspond to respective ones of control limiting areas of one and the same camera server, and cameras 4 and 5 are separate camera servers.

The present embodiment is characterized by the following:

- 1) A camera server is provided with means for managing a plurality of camera control limiting areas, namely areas (referred to as "control limiting areas") in which the range of camera pan and tilt angles and zoom magnification is limited;
- 2) the individual limiting areas are limited in control range by setting left and right extremes of pan angles, upper and lower limits of tilt angles and upper and lower limits of zoom magnification;

3) it appears to the client process as if each control limiting area is a separate, independent virtual camera; and

4) in a case where a plurality of control limiting areas are switched among, it appears to the client process as if a plurality of cameras are being switched among.

As a result of the above, it is possible to set camera-control limiting ranges more realistically and flexibly for areas involving privacy-related problems. In other words, camera-control limiting areas are set simply one at a time. A plurality of such control limiting areas can be set based on the concept of a plurality of virtual cameras. The person setting a camera control range, therefore, need only set the control limiting ranges as different cameras. From the standpoint of the client process, these areas seem to be separate cameras having different control limiting ranges. This makes it easy to grasp the limiting ranges.

According to the first and second embodiments, the camera server requires hardware, namely image sensing means and means for connecting it to a network. However, this can be realized by a general-purpose information processing apparatus such as a personal computer. Further, as the client merely lacks the image

sensing means, the basic hardware thereof is the same as that of the camera server and it, too, can be constructed using a general-purpose information processing apparatus such as a personal computer.

5           In other words, it will suffice if the necessary hardware is exploited and a program for operating the apparatus as a camera server or client is provided. Accordingly, the object of the invention is attained by supplying a storage medium storing the program codes of  
10 the software for performing the functions of the foregoing embodiments to a system or an apparatus, reading the program codes with a computer (e.g., a CPU or MPU) of the system or apparatus from the storage medium, and then executing the program codes.

15           In this case, the program codes read from the storage medium implement the novel functions of the invention, and the storage medium storing the program codes constitutes the invention.

          Further, the storage medium, such as a floppy disk,  
20 hard disk, optical disk, magneto-optical disk, CD-ROM, CD-R, magnetic tape, non-volatile type memory card or ROM can be used to provide the program codes.

          Furthermore, besides the case where the aforesaid functions according to the embodiments are implemented  
25 by executing the program codes read by a computer, it goes without saying that the present invention covers a

case where an operating system or the like running on the computer performs a part of or the entire process in accordance with the designation of program codes and implements the functions according to the embodiments.

5           It goes without saying that the present invention further covers a case where, after the program codes read from the storage medium are written in a function expansion board inserted into the computer or in a memory provided in a function extension unit connected  
10 to the computer, a CPU or the like contained in the function expansion board or function expansion unit performs a part of or the entire process in accordance with the designation of program codes and implements the function of the above embodiments.

15           Although a camera has been mentioned as an example of the image sensing means in the foregoing embodiments, this does not impose a limitation, for a device such as a flat-bed scanner may also be used as such means.

          Thus, in accordance with the second embodiment of  
20 the present invention, as described above, it is possible to provide an excellent operating environment, without giving a client an odd impression, while setting a plurality of scattered imaging control areas within a range in which imaging can be performed by image sensing  
25 means whose shooting direction can be changed.

          As many apparently widely different embodiments of



the present invention can be made without departing from  
the spirit and scope thereof, it is to be understood  
that the invention is not limited to the specific  
embodiments thereof except as defined in the appended  
5 claims.

WHAT IS CLAIMED IS:

1. A camera control apparatus for controlling shooting direction and zoom magnification of a camera, comprising:

5       input means for inputting a control command for controlling shooting direction or zoom magnification of the camera;

          calculation means for calculating, on the basis of the control command input by said input means, an area  
10   to be imaged by the camera;

          limiting means for limiting a control range of the zoom magnification of the camera in a case where the imaging area of the camera calculated by said calculation means overlaps a prescribed area; and

15       control means for controlling the zoom magnification of the camera so as to fall within the control range, which has been limited by said limiting means, in a case where the zoom magnification of the camera exceeds the control range limited by said  
20   limiting means.

2. The apparatus according to claim 1, further comprising storage means for storing limit information concerning the control range of the zoom magnification of the camera corresponding to the prescribed area.

25   3. The apparatus according to claim 1, wherein said limiting means limits an upper limit of the zoom

magnification of the camera in such a manner that the upper limit of the zoom magnification of the camera will be lower than in a case where the imaging area of the camera does not overlap the prescribed area.

- 5 4. The apparatus according to claim 3, wherein said control means controls the zoom magnification of the camera to the upper limit of the control range, which has been limited by said limiting means, in a case where the zoom magnification of the camera has exceeded the  
10 upper limit of the control range limited by said limiting means.

5. A camera control system for controlling shooting direction and zoom magnification of a camera from an operation terminal via a network, wherein said operation  
15 terminal comprises:

input means for inputting a control command for controlling shooting direction or zoom magnification of the camera, and

- output means for outputting the control command,  
20 which has been input by said input means, to a camera control apparatus that controls the camera; and

said camera control apparatus comprises:

- calculation means for calculating, on the basis of the control command output by the operation terminal, an  
25 area to be imaged by the camera;

limiting means for limiting a control range of the

zoom magnification of the camera in a case where the  
imaging area of the camera calculated by said  
calculation means overlaps a prescribed area; and  
control means for controlling the zoom

5 magnification of the camera so as to fall within the  
control range, which has been limited by said limiting  
means, in a case where the zoom magnification of the  
camera exceeds the control range limited by said  
limiting means.

10 6. The system according to claim 5, wherein the camera  
control apparatus further comprises storage means for  
storing limit information concerning the control range  
of the zoom magnification of the camera corresponding to  
the prescribed area.

15 7. The system according to claim 5, wherein the  
limiting means limits an upper limit of the zoom  
magnification of the camera.

8. The system according to claim 7, wherein said  
control means controls the zoom magnification to the  
20 upper limit of the control range, which has been limited  
by said limiting means, in a case where the zoom  
magnification of the camera has exceeded the upper limit  
of the control range limited by said limiting means.

9. A camera control method for controlling shooting  
25 direction and zoom magnification of a camera,  
comprising:

an input step of inputting a control command for  
controlling shooting direction or zoom magnification of  
the camera;

a calculation step of calculating, on the basis of  
5 the control command input by said input step, an area to  
be imaged by the camera;

a limiting step of limiting a control range of the  
zoom magnification of the camera in a case where the  
imaging area of the camera calculated by said  
10 calculation step overlaps a prescribed area; and

a control step of controlling the zoom  
magnification of the camera so as to fall within the  
control range, which has been limited by said limiting  
step, in a case where the zoom magnification of the  
15 camera exceeds the control range limited by said  
limiting step.

10. The method according to claim 9, further comprising  
a storage step of storing limit information concerning  
the control range of the zoom magnification of the  
20 camera corresponding to the prescribed area.

11. The method according to claim 9, wherein said  
limiting step limits an upper limit of the zoom  
magnification of the camera.

12. The method according to claim 11, wherein said  
25 control step controls the zoom magnification of the  
camera to the upper limit of the control range, which

has been limited by said limiting step, in a case where the zoom magnification of the camera has exceeded the upper limit of the control range limited by said limiting step.

- 5 13. A storage medium storing a camera control program for controlling shooting direction and zoom magnification of a camera, wherein the stored program:
- calculates, on the basis of a control command for controlling shooting direction or zoom magnification of
- 10 the camera, an area to be imaged by the camera;
- limits a control range of the zoom magnification of the camera in a case where the calculated imaging area of the camera overlaps a prescribed area; and
- controls the zoom magnification of the camera so as
- 15 to fall within the limited control range in a case where the limited control range is exceeded.
14. The storage medium according to claim 13, wherein the stored control program further stores limit information concerning the control range of the zoom
- 20 magnification of the camera corresponding to the prescribed area.
15. The storage medium according to claim 13, wherein the stored control program further limits an upper limit of the zoom magnification of the camera.
- 25 16. The storage medium according to claim 15, wherein the stored control program further controls the zoom

magnification of the camera to the upper limit of the control range in a case where the upper limit of the limited control range is exceeded.

17. A camera control apparatus for controlling zoom  
5 magnification of a camera, comprising:

input means for inputting a control command for controlling zoom magnification of the camera;

- calculation means for calculating, on the basis of the control command input by said input means, an area  
10 to be imaged by the camera;

limiting means for limiting a control range of the zoom magnification of the camera in a case where the imaging area of the camera calculated by said calculation means overlaps a prescribed area; and

- 15 control means for controlling the zoom magnification of the camera so as to fall within the control range, which has been limited by said limiting means, in a case where the zoom magnification of the camera exceeds the control range limited by said  
20 limiting means.

18. A camera control method for controlling zoom magnification of a camera, comprising:

an input step of inputting a control command for controlling zoom magnification of the camera;

- 25 a calculation step of calculating, on the basis of the control command input by said input step, an area to

be imaged by the camera;

a limiting step of limiting a control range of the zoom magnification of the camera in a case where the imaging area of the camera calculated by said

5 calculation step overlaps a prescribed area; and

a control step of controlling the zoom magnification of the camera so as to fall within the control range, which has been limited by said limiting step, in a case where the zoom magnification of the  
10 camera exceeds the control range limited by said limiting step.

19. The system according to claim 5, wherein the network is a LAN or ISDN line.

20. An image pick-up server, which has image sensing  
15 means, for performing a distribution service which distributes video information obtained by said image sensing means to a client via a network, comprising:

storage means for setting a plurality of shootable areas, which are the object of the distribution service,  
20 within a range in which shooting direction of said image sensing means can be changed, and storing information relating to the plurality of shootable areas set and information which specifies a plurality of virtual image sensing means for respective ones of the shootable  
25 areas; and



- control means for reading out, from said storage means, information corresponding to virtual image sensing means selectively designated by the client, setting a range in which it is possible to change the shooting direction of said image sensing means based upon the information relating to the shootable area indicated by the information that has been read out, and controlling said image sensing means within the range in which it is possible to change the shooting direction.
- 5 21. The server according to claim 20, wherein said storage means stores, with respect to said plurality of shootable areas, identification numbers of respective ones of said virtual image sensing means, and information indicating ranges of pan and tilt angles of
- 10 said image sensing means.
22. The server according to claim 21, wherein said storage means stores information indicating ranges over which zoom magnification can be changed with respect to said plurality of shootable areas.
- 15 23. The server according to claim 20, wherein said control means includes means for inhibiting distribution of video information, which has been obtained by said image sensing means, during changing of the shooting direction of said image sensing means in order to change
- 20 over the virtual image sensing means.
24. The server according to claim 20, wherein

information relating to the shootable areas is stored in the server.

25. A client connected to the image pick-up server set forth in claim 20, comprising:

5           selection notification means for selecting one of said virtual image sensing means that have been stored in said storage means and notifying said image pick-up server of the information specifying the selected virtual image sensing means;

10          display means for displaying an image distributed by said image pick-up server; and

            shooting-direction change designation means for changing the shooting direction of the virtual image sensing means selected by said selection notification  
15 means and instructing said server of result of the change.

26. The client according to claim 25, wherein the information relating to the shootable areas is downloaded from said image pick-up server.

20       27. An image pick-up system comprising an image pick-up server, which has image sensing means, for performing a distribution service which distributes video information obtained by the image sensing means to a client via a network, and a client for receiving the video  
25 information from said image pick-up server, wherein said image pick-up server includes:

storage means for setting a plurality of shootable areas, which are the object of the distribution service, within a range in which shooting direction of said image sensing means can be changed, and storing information  
5 relating to the plurality of shootable areas set and information which specifies a plurality of virtual image sensing means for respective ones of the shootable areas; and

control means for reading out, from said storage  
10 means, information corresponding to virtual image sensing means selectively designated by the client, setting a range in which it is possible to change the shooting direction of said image sensing means based upon the information relating to the shootable area  
15 indicated by the information that has been read out, and controlling said image sensing means within the range in which it is possible to change the shooting direction; and

said client includes:

20 selection notification means for selecting one of said virtual image sensing means that have been stored in said storage means and notifying said image pick-up server of the information specifying the selected virtual image sensing means;

25 display means for displaying an image distributed by said image pick-up server; and

shooting-direction change designation means for changing the shooting direction of the virtual image sensing means selected by said selection notification means and instructing said server of result of the  
5 change.

28. A method of controlling an image pick-up server, which has image sensing means, for performing a distribution service which distributes video information obtained by the image sensing means to a client via a  
10 network, said method comprising:

a storage step of setting a plurality of shootable areas, which are the object of the distribution service, within a range in which shooting direction of said image sensing means can be changed, and storing, in prescribed  
15 storage means, information relating to the plurality of shootable areas set and information which specifies a plurality of virtual image sensing means for respective ones of the shootable areas; and

a control step of reading out, from said storage  
20 means, information corresponding to virtual image sensing means selectively designated by the client, setting a range in which it is possible to change the shooting direction of said image sensing means based upon the information relating to the shootable area  
25 indicated by the information that has been read out, and controlling said image sensing means within the range in

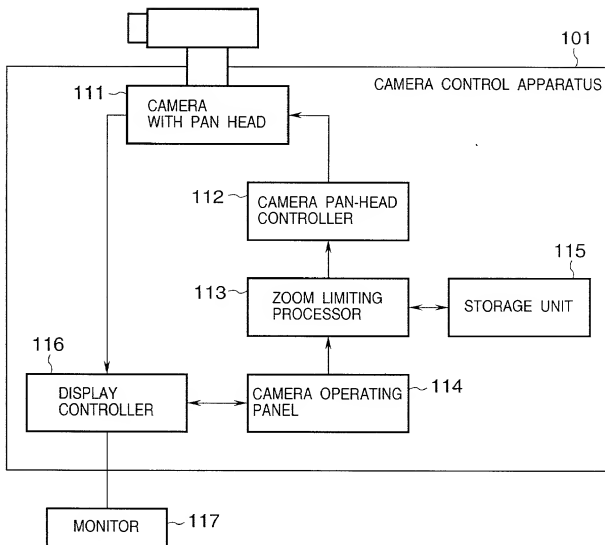
which it is possible to change the shooting direction.

29. A storage medium storing program code which, by  
being read in and executed by a computer, functions as  
an image pick-up server, which has image sensing means,  
5 for performing a distribution service which distributes  
video information obtained by the image sensing means to  
a client via a network, said storage medium storing  
program code which functions as:

storage means for setting a plurality of shootable  
10 areas, which are the object of the distribution service,  
within a range in which shooting direction of said image  
sensing means can be changed, and storing information  
relating to the plurality of shootable areas set and  
information which specifies a plurality of virtual image  
15 sensing means for respective ones of the shootable  
areas; and

control means for reading out, from said storage  
means, information corresponding to virtual image  
sensing means selectively designated by the client,  
20 setting a range in which it is possible to change the  
shooting direction of said image sensing means based  
upon the information relating to the shootable area  
indicated by the information that has been read out, and  
controlling said image sensing means within the range in  
25 which it is possible to change the shooting direction.

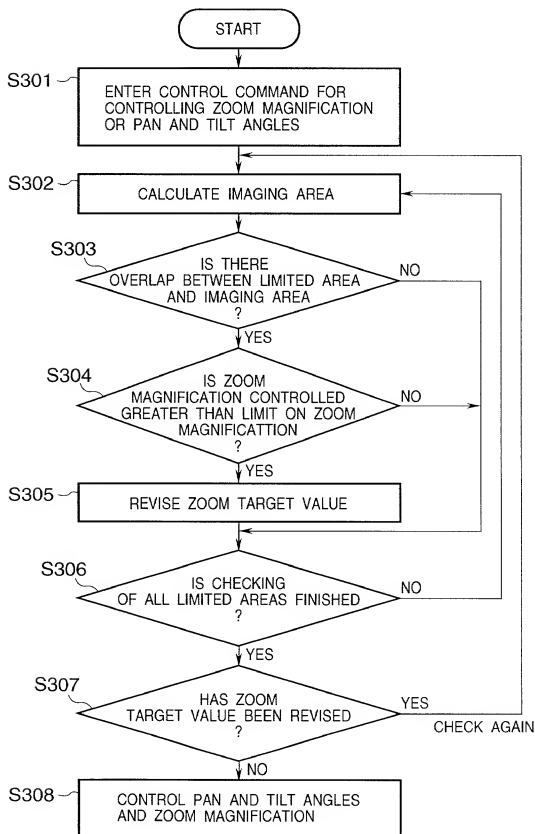
FIG. 1



**FIG. 2**

LIMITED AREA	x	y	MAXIMUM ALLOWABLE ZOOM MAGNIFICATION
202	1.5 ~ 3.5	-1 ~ -3	2.0
203	-5.5 ~ -1.5	2 ~ 4	1.5
.	.	.	.
.	.	.	.
.	.	.	.

FIG. 3





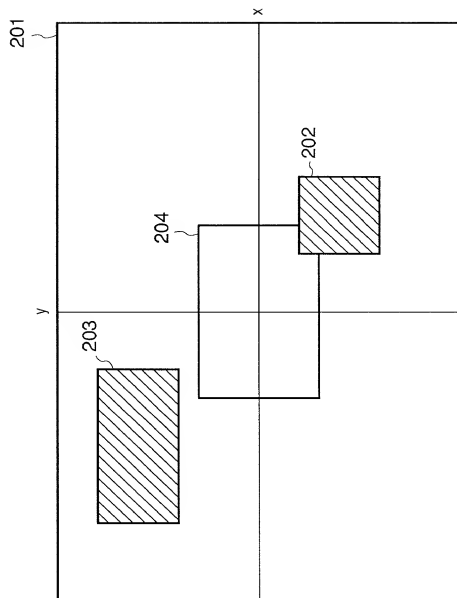
**FIG. 4**

FIG. 5

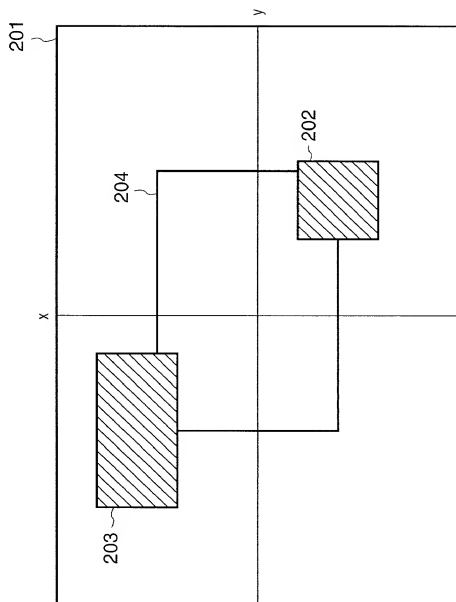
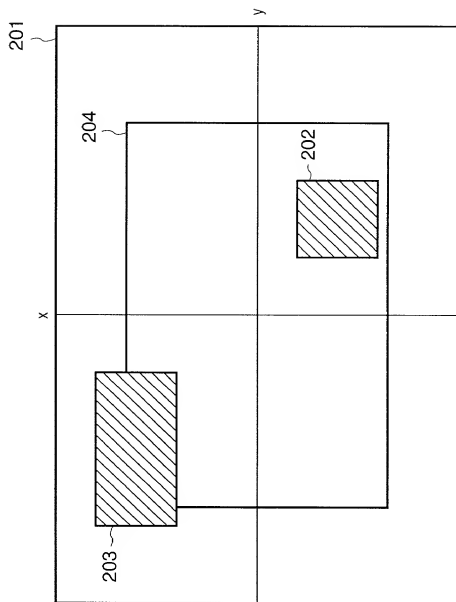


FIG. 6



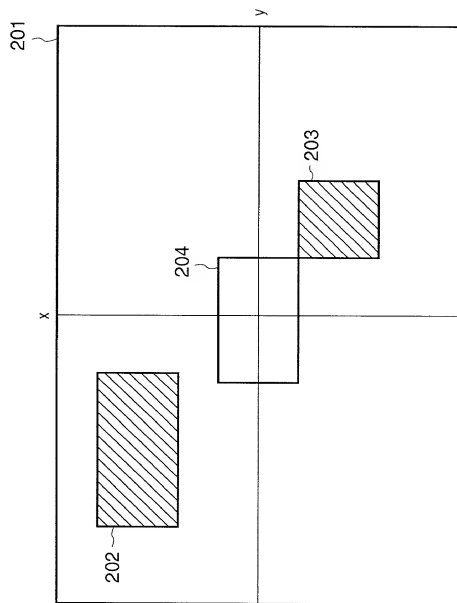
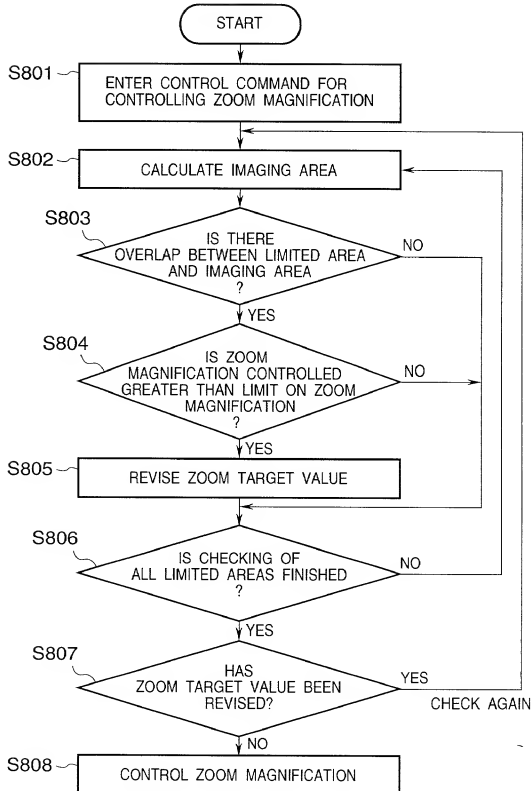
**FIG. 7**

FIG. 8



9/21

FIG. 9

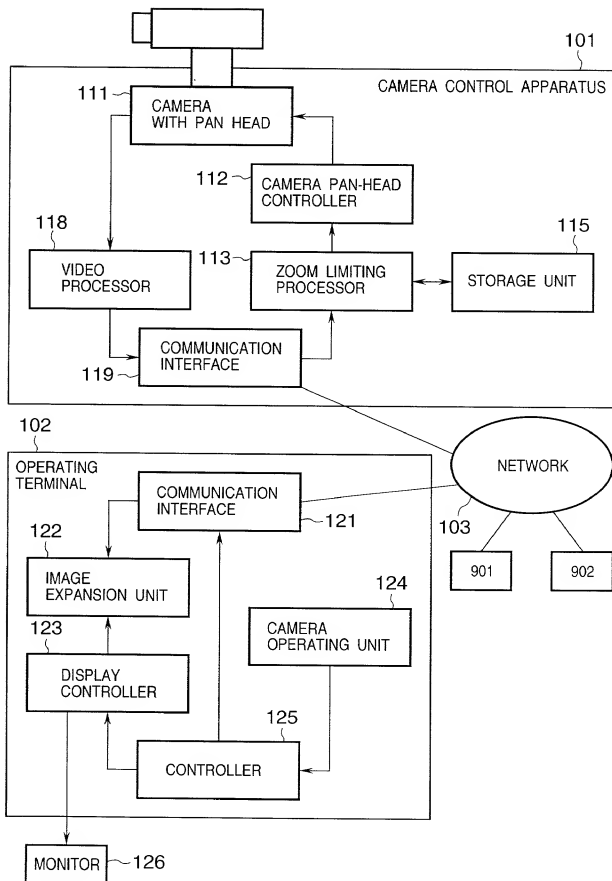


FIG. 10

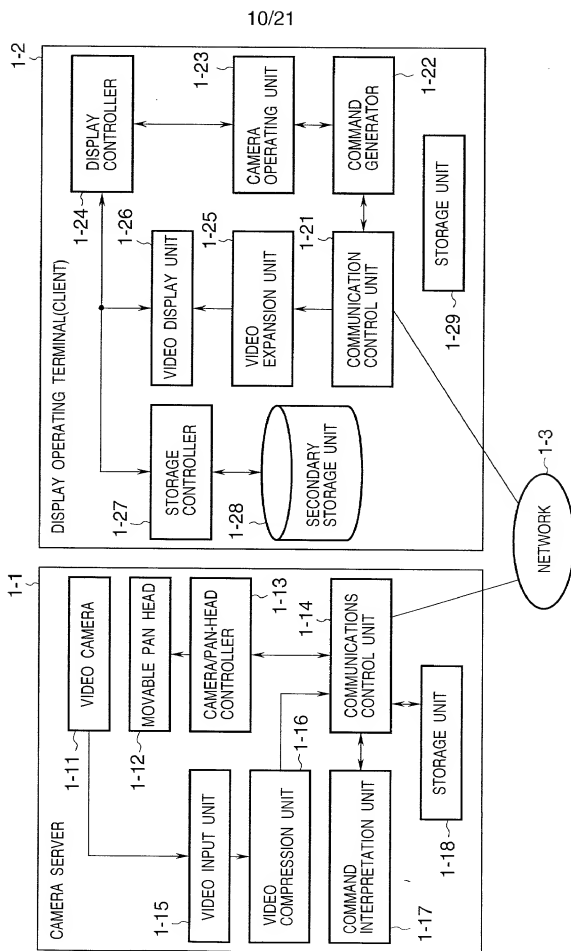


FIG. 11

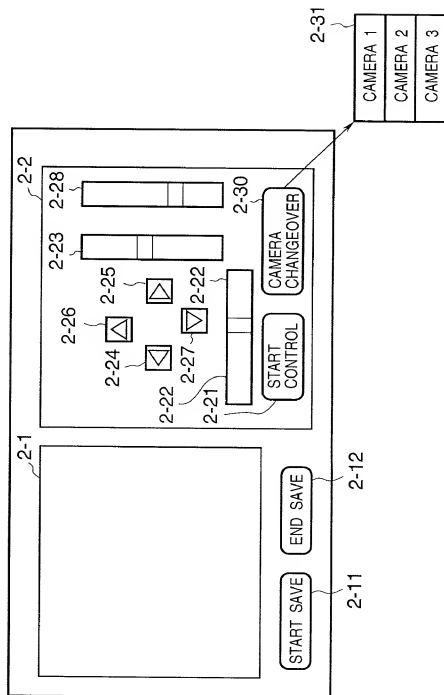




FIG. 12

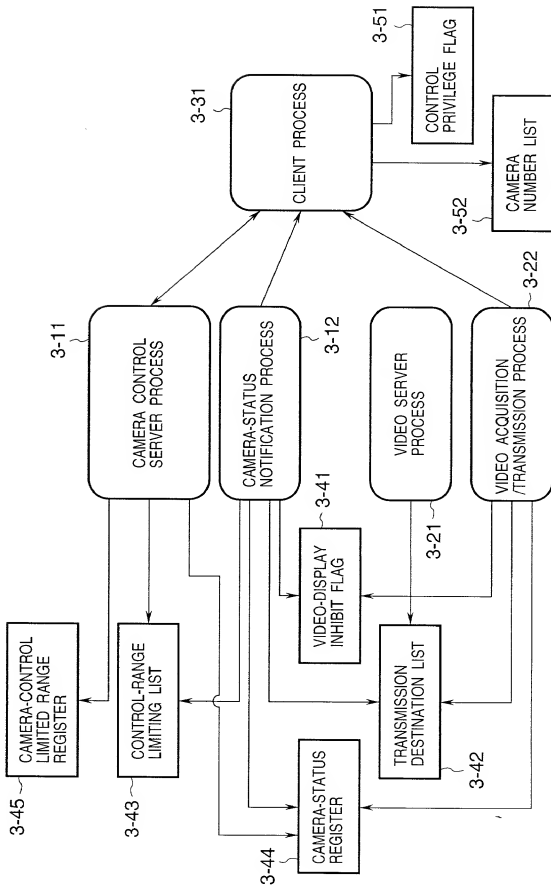


FIG. 13

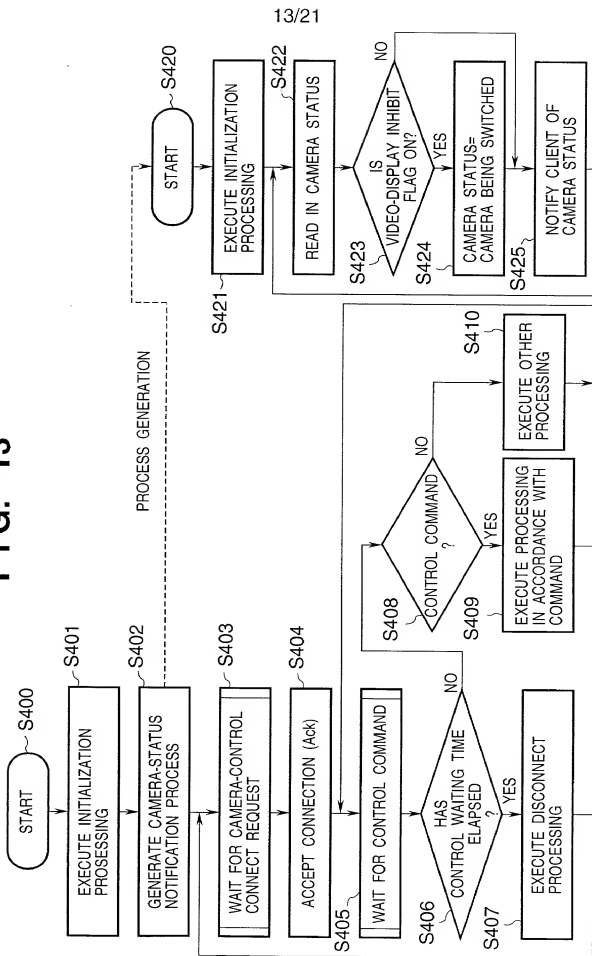


FIG. 14

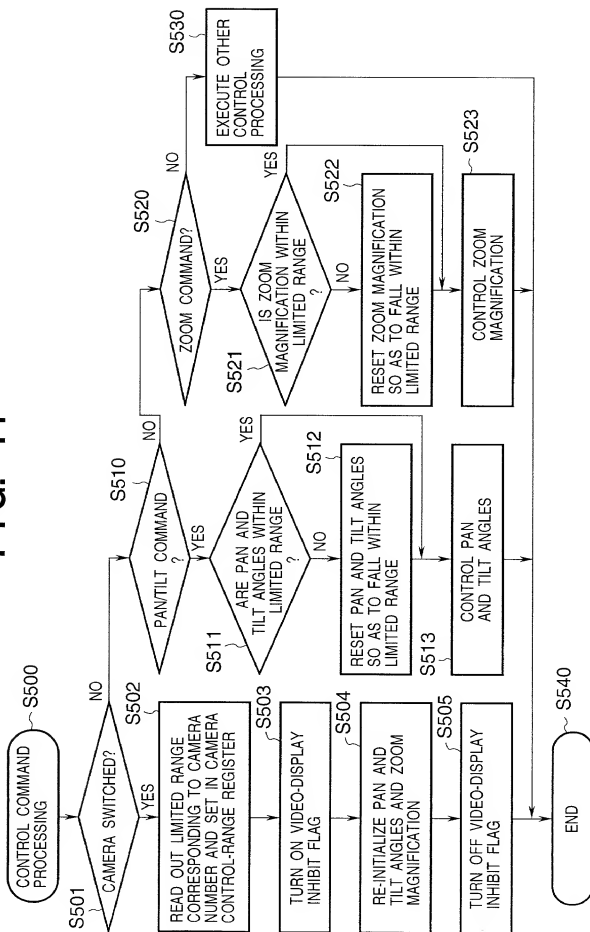


FIG. 15

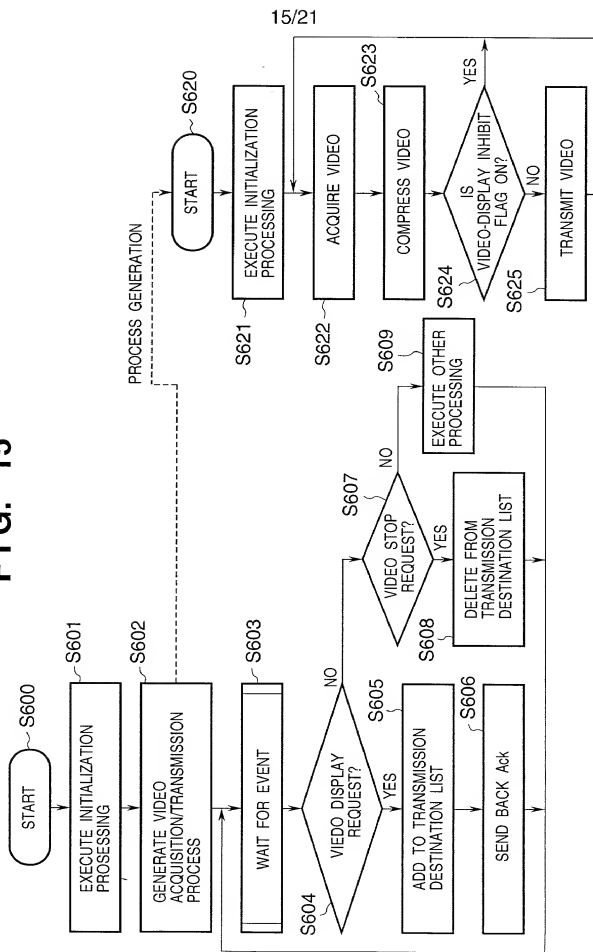


FIG. 16

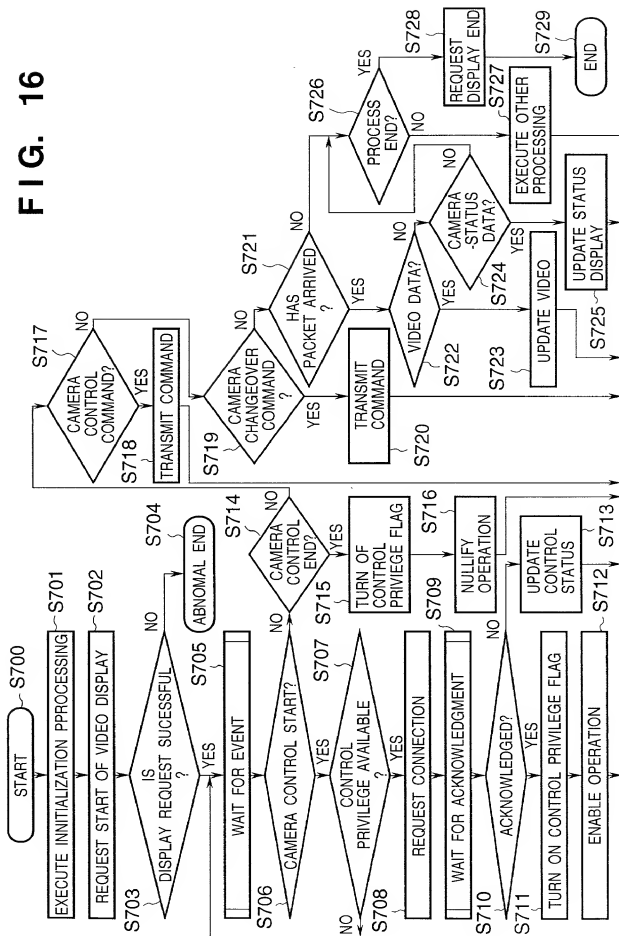


FIG. 17

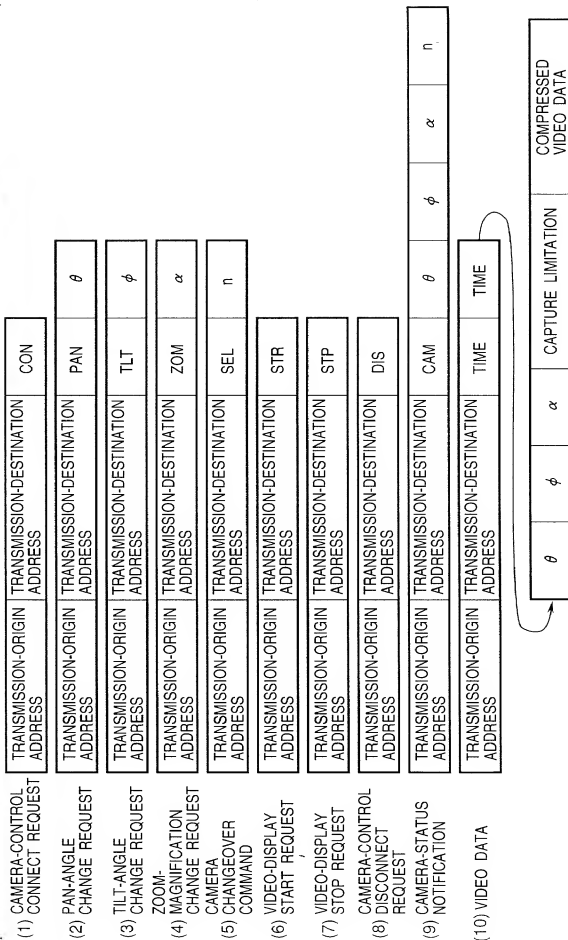


FIG. 18

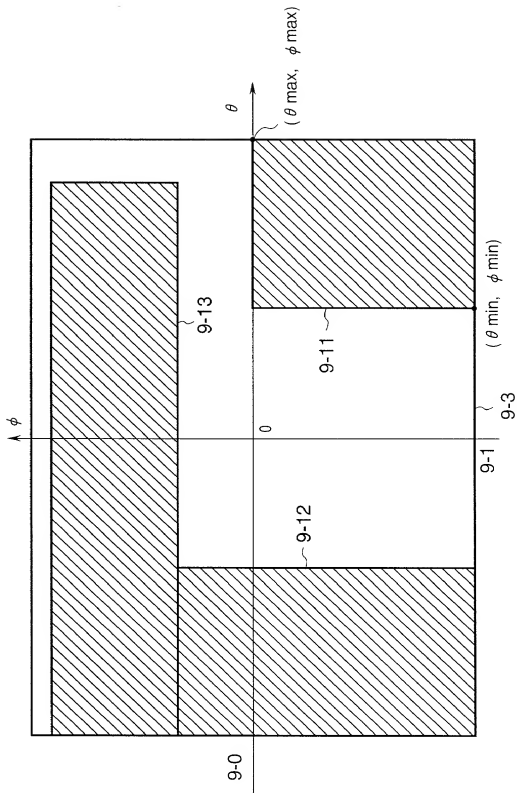
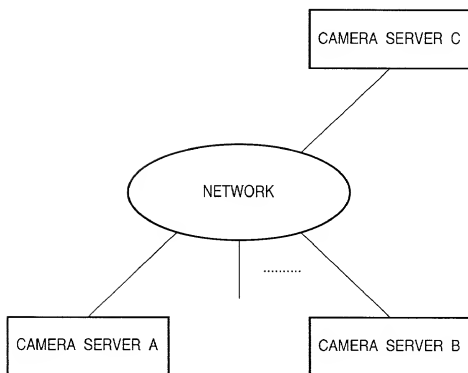


FIG. 19

VIRTUAL-CAMERA ID NO.	PAN LIMIT (LEFT)	PAN LIMIT (RIGHT)	TILT LIMIT (UP)	TILT LIMIT (DOWN)	ZOOM LIMIT (UPPER)	ZOOM LIMIT (LOWER)
1	-90	-30	30	0	8	1
3	10	20	-10	10	8	4
2	-50	-10	0	-20	2	1



**FIG. 20**

**FIG. 21**

		▼
CAMERA LIST		
• CAMERA 1	} CAMERA SERVER A	▲
• CAMERA 2		
• CAMERA 3		
• CAMERA 4	CAMERA SERVER B	
• CAMERA 5	CAMERA SERVER C	▼

ABSTRACT OF THE DISCLOSURE

Provided is a camera control system which will not invade one's privacy even if a camera is located where there is a problem in terms of privacy. To accomplish this, the system is provided with an input unit for inputting a control command for controlling shooting direction or zoom magnification of the camera, a calculation unit for calculating, on the basis of the control command input by the input unit, an area to be imaged by the camera, a limiting unit for limiting a control range of the zoom magnification of the camera in a case where the imaging area of the camera calculated by the calculation unit overlaps a prescribed area; and a control unit for controlling the zoom magnification of the camera so as to fall within the control range, which has been limited by the limiting unit, in a case where the zoom magnification of the camera exceeds the control range limited by the limiting unit.